ViewSonic® VG710s/VG710b LCD Display

17" DigitalMedia Slim Bezel Display

Multimedia functionality in a space-saving design.

The 17" ViewSonic VG710s and VG710b LCD displays combine a refined slim-bezel design with the quality you have come to expect from ViewSonic. **OPTISYNC® TECHNOLOGY** supports both digital (DVI) and analogue (VGA) signals for added versatility and connectivity. Two built-in **3-WATT SPEAKERS**, deliver rich, stereo sound to your desktop. Combine all this with **CLEARMOTIV™ BROADCAST-QUALITY VIDEO** featuring an ultra-fast 16ms video response time and a 450:1 contrast ratio (typ) and you have the ideal LCD display for home, small/home office, corporate, government or education use.

Versatile, affordable, portable.

OPTISYNC BEYOND DIGITAL digital/analogue inputs expand your connectivity

Multi-mode input technology supports both digital (DVI) and analogue (VGA) signals for ultimate compatibility and configuration flexibility.

Multimedia enhanced

Save desk and workspace and enjoy rich, stereo sound with two built-in 3-watt stereo speakers.

ClearMotiv™ technology

Super-fast 16ms video response delivers broadcast-quality full motion video at 62.5 fps.

Stylish slim-bezel design

The full 17" viewable screen in an ultra-thin bezel lets you see more without taking up valuable desktop real estate.

High brightness and contrast

250-nit brightness (typ) and 450:1 contrast ratio (typ) for rich, detailed images.

Full 17" viewable

1280x1024 resolution

OnView® controls for superior screen adjustability

Screen adjustments are precisely made via an easy-to-use on-screen menu.

VESA® 100mm wall mount compliant

PC and MAC® compatible

TCO'03 and ENERGY qualified

TCO'03 for silver and TCO'99 for black models.

sRGB colour Management

For a closer match of image display to printed out colours.

All-in-one

ViewSonic®
See the difference.™

ViewSonic® VG710s/VG710b LCD Display

17" DigitalMedia Slim Bezel Display

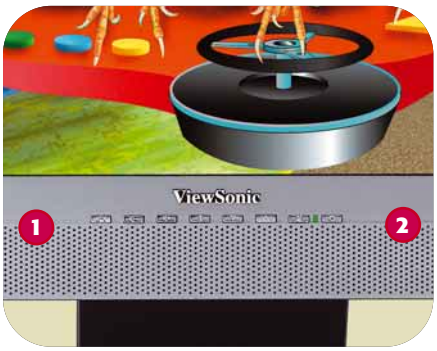

1. *Sleek buttons control all major functions*
2. *Integrated stereo 3-watt speakers*
3. *Space-saving slim-line design is only 5cm thick*
4. *Stylish slim-bezel design*
5. *Compact, multimedia, attractive styling*

Available colours:
Black (VG710b), Silver-on-black (VG710s).

specifications

LCD PANEL	**Type**	17.0" colour TFT active matrix SXGA LCD
	Display Area	33.8cm horizontal x 27cm vertical; 43.2cm diagonal
	Optimum Resolution	1280x1024
	Contrast Ratio	450:1 (typ)
	Viewing Angles	140° horizontal, 120° vertical
	Response Time	16ms (typ.)
	Brightness	250 cd/m² (typ)
	Panel Surface	Anti-glare
VIDEO INPUT	**Analogue**	RGB analogue (75 ohms, 0.7 Vp-p)
	Digital	DVI-D (TMDS, 100 ohms)
	Frequency	F_H: 30~82kHz, F_V: 50~85Hz
	Sync	H/V separated (TTL)
COMPATIBILITY	**PC**	VGA up to 1280x1024
	Mac®[1]	Power Mac™ G3/G4 up to 1280x1024
CONNECTOR	**Signal**	15-pin mini D-sub, DVI-D[2]
	Audio	3.5mm audio line-in
	Power	3-pin AC plug
AUDIO	**Speakers**	2x3-watts
	Amplifier	3 watts @1kHz
POWER	**Voltage**	AC 100–240V external adapter
	Consumption	< 36W (typ)
USER CONTROLS	**Basic**	Power (soft), 1, down, up, 2, mute, volume up, volume down
	OSD	Auto image adjust, contrast, brightness input select, audio adjust (volume, mute), ViewMatch® colour adjust (sRGB, 9300K, 6500K-default, 5400K, 5000K, user colour), information (mode, model number, serial number), manual image adjust (H. size, H. position, V. position, fine tune, sharpness), setup menu (language, resolution notice, OSD position, OSD timeout), memory recall
OPERATING CONDITIONS	**Temperature**	0–40°C
	Humidity	10–90% (non-condensing)
DIMENSIONS	**Physical**	378mm x 405mm x 177mm (with stand) 378mm x 405mm x 50mm (without stand)
WEIGHT	**Net**	5.3kg
REGULATIONS		TCO'03 (VG710s), TCO'99 (VG710b), TÜV/GS, ISO 13406-2 (class 2) TÜV-S, TÜV/Ergo, UL, CUL, FCC-B, CB REPORT, CE, EPA, NOM, NEMKO, SEMKO, DEMKO, FIMKO, GOST-R, PCBC, VCCI, BSMI, CCC, PSB, C-TICK, ENERGY
POWER MANAGEMENT		Meets TCO'03 (VG710s), TCO'99 (VG710b) and ENERGY standards.
WARRANTY		Three-year limited warranty

ISO 9001 FM 40187 ISO 14001 EMS 40968

ViewSonic Corporation's QMS\EMS has been registered to ISO 9001 & ISO 14001 by the British Standards Institution.

ViewSonic®
See the difference.™

ViewSonic Europe Limited/UK
ViewSonic House
Fleming Way, Crawley
West Sussex, RH10 9GA
United Kingdom

Tel: +44 (0) 12 93 64 39 00
Fax: +44 (0) 12 93 64 39 10

ViewSonic Germany
Hanns-Martin-Schleyer-Straße 18A
47877 Willich
Germany

Tel: +49 (0) 21 54 91 88 0
Fax: +49 (0) 21 54 91 88 10

ViewSonic France
Parc des Barbanniers
1 allée des Bas Tilliers
92230 Gennevilliers
France

Tel: +33 (0) 1 41 47 49 00
Fax: +33 (0) 1 41 47 49 10

ViewSonic Corporation
381 Brea Canyon Road
Walnut
California 91789-0708
USA

Tel: +1 909 869 7976
Fax: +1 909 869 7958

ViewSonic Benelux Tel: +32 056/85 26 27
ViewSonic Denmark Tel: +45 70 22 11 71
ViewSonic Finland Tel: +358 (9) 54 06 40 70
ViewSonic Italy Tel: +39 0289 079 340
ViewSonic MEA Tel: +971 (0) 4 88 11 871
ViewSonic Norway Tel: +47 (0) 22 88 17 60
ViewSonic Spain Tel: +34 (0) 91 63 05 339
ViewSonic Sweden Tel: +46 (0) 8 50 71 30 00

[1] Adapter may be required. [2] DVI cable not included. Specifications subject to change without notice. Selection, offers and programmes may vary by country; see your ViewSonic representative for complete details. Corporate names, trademarks stated herein are the property of their respective companies. Copyright © 2004 ViewSonic Corporation. All rights reserved. VG710b/s 02/04-UK

For more product information, visit us on the web at www.ViewSonicEurope.com